



ACE AMPLIFICATION

SET UP




QUICK START GUIDE

Important : always connect a speaker cabinet before powering on your ACE amplifier.

1. Plug your amp into your speaker cabinet.
Only use speaker cable to connect the amp and the cabinet.
Use only ONE speaker output of the amp at a time.
Check that the impedance of your speaker matches the selected speaker output of the amp.
2. Plug your power cable.
3. Switch on the amp with the power switch.
Allow approx 30s for the tubes to warm before you can get some sounds.


CONNECTIONS

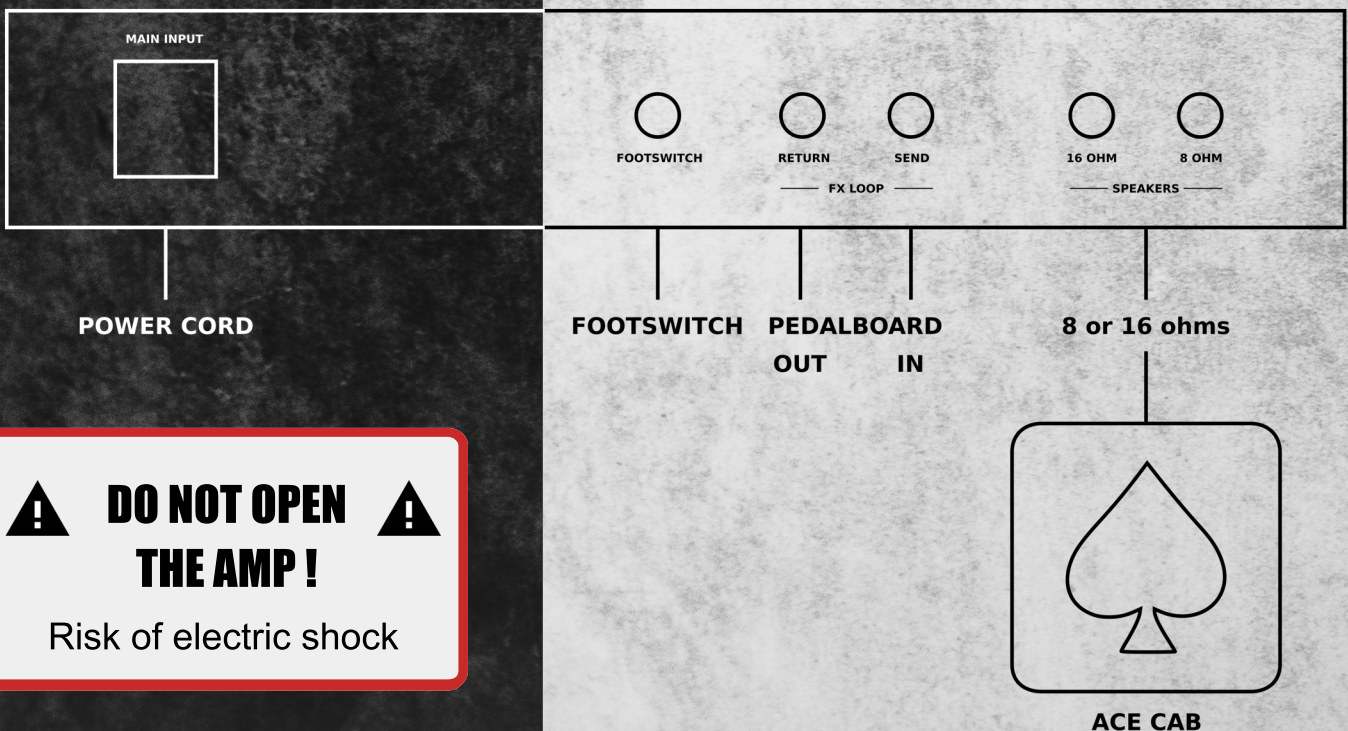

⚠ DO NOT OPEN THE AMP ! ⚠

Risk of electric shock

CONTROLS

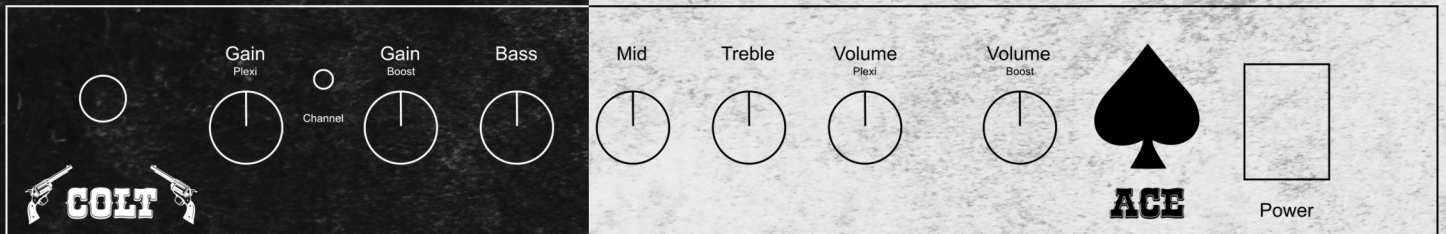

GAIN (Plexi) : adjusts the gain of the Plexi channel.

GAIN (Boost) : adjusts the gain of the Boost channel.

CHANNEL (switch) : selects channel. When using a footswitch, this switch is disabled.

BASS/MID/TREBLE : adjusts the amount of bass/mid/treble.

- Notes :
- Controls are shared between the two channels.
 - Dialing TREBLE down can increase basses.
 - When all controls are dialed all the way down, the amp doesn't produce any sound.

VOLUME (Plexi) : adjusts the volume of the Plexi channel.

VOLUME (Boost) : adjusts the volume of the Boost channel.

POWER : turns the amp ON of OFF. Switch should be illuminated when the amp is ON.

POWER MODE (on the back) : when LOW is selected, amp is operating in 2w mode.



ACE AMPLIFICATION